




NuVision TM1088 Battery Replacement

Replacing a battery to restore battery life of device. (Requires soldering)

Written By: Nathaniel Nasman

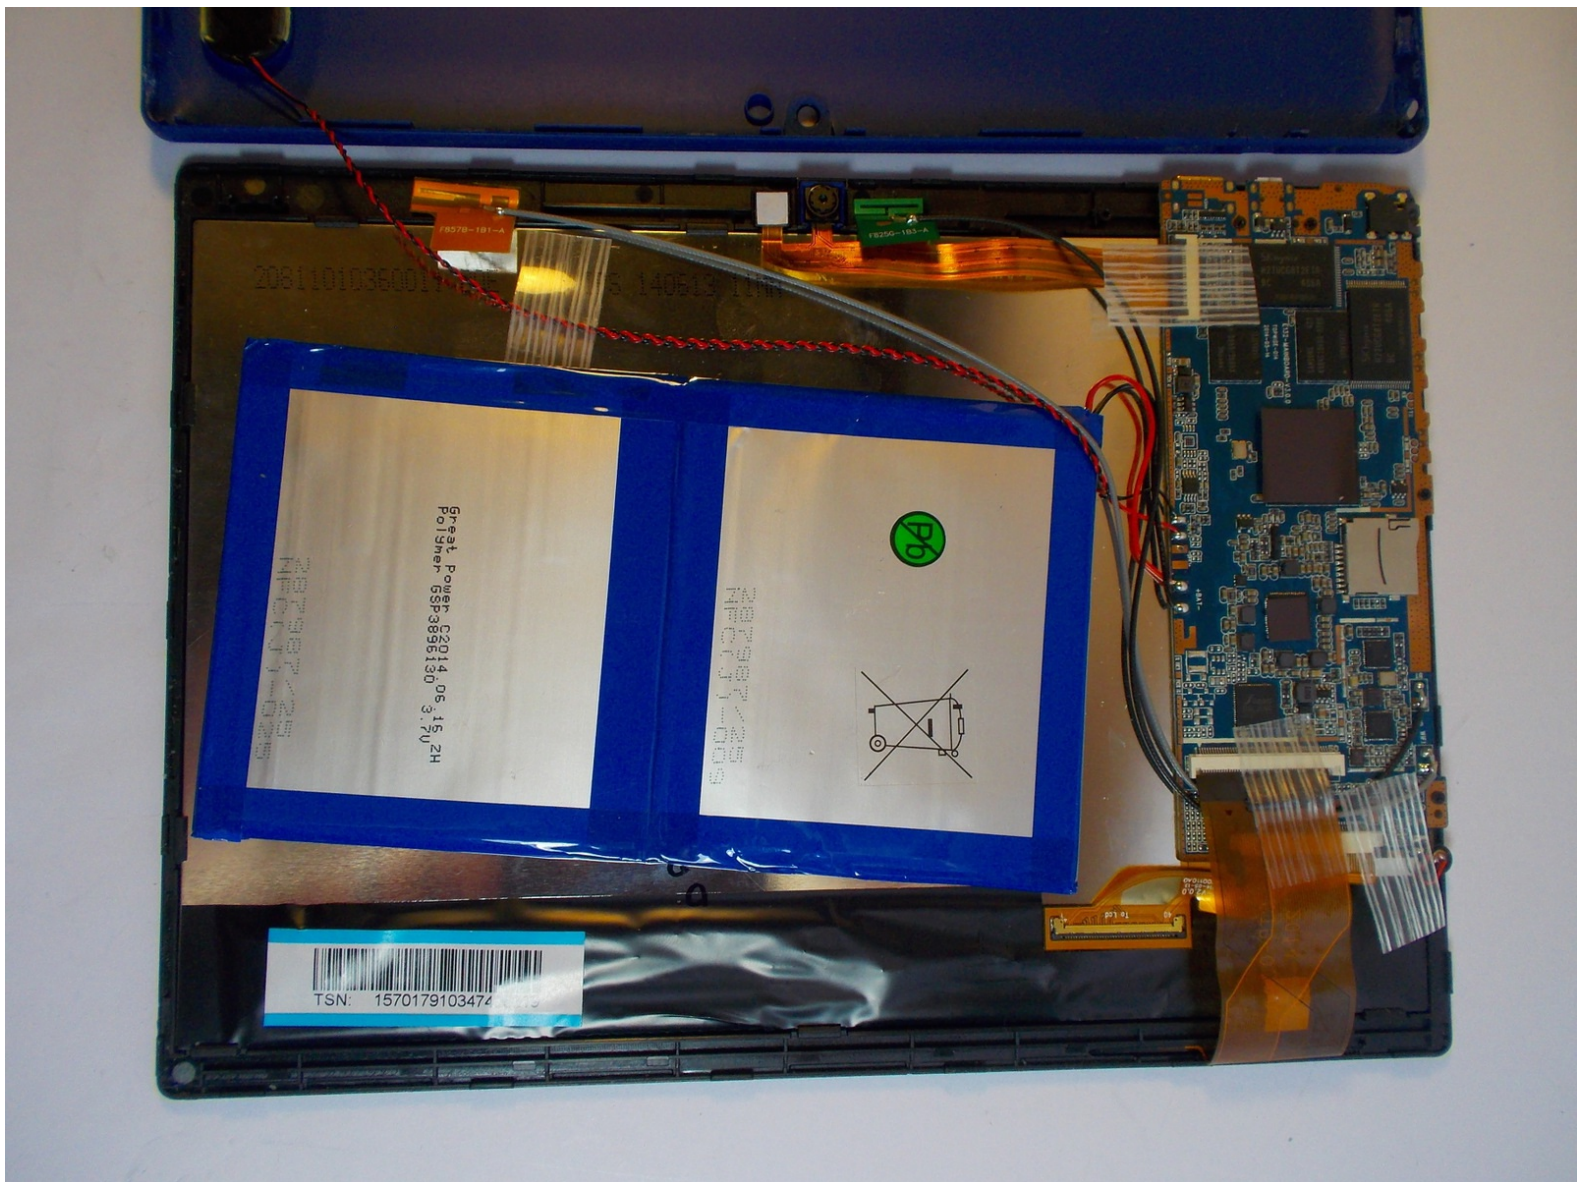

INTRODUCTION

Replacing the battery is a fairly simple process. It consists of opening the device and removing the solder holding the battery's wires.



TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Soldering Station](#) (1)
-

Step 1 — Rear Cover




- Place the plastic opening tool between the front and rear cover and pry up on each corner of the cover.

Step 2 — Battery

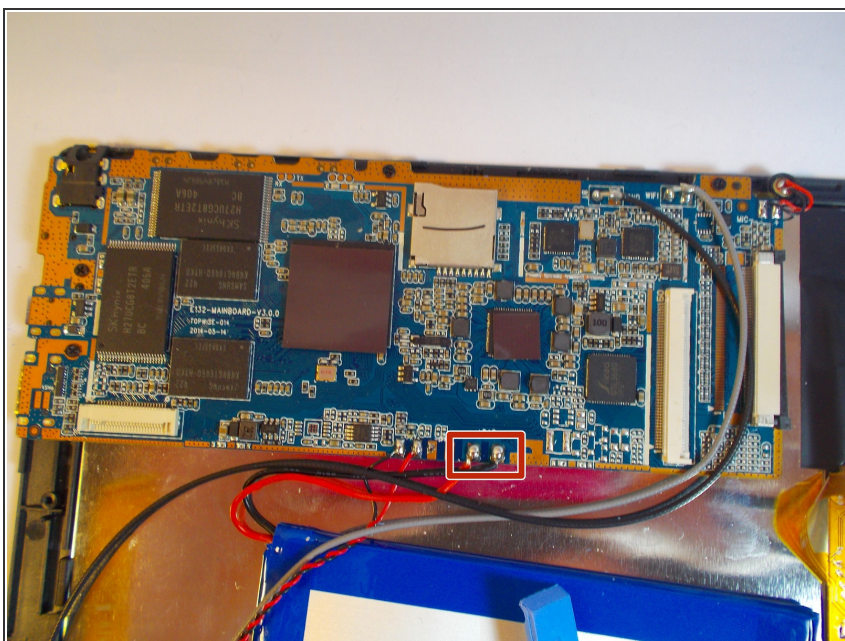

- Melt the solder on the red and black wires and remove wires.

Step 3

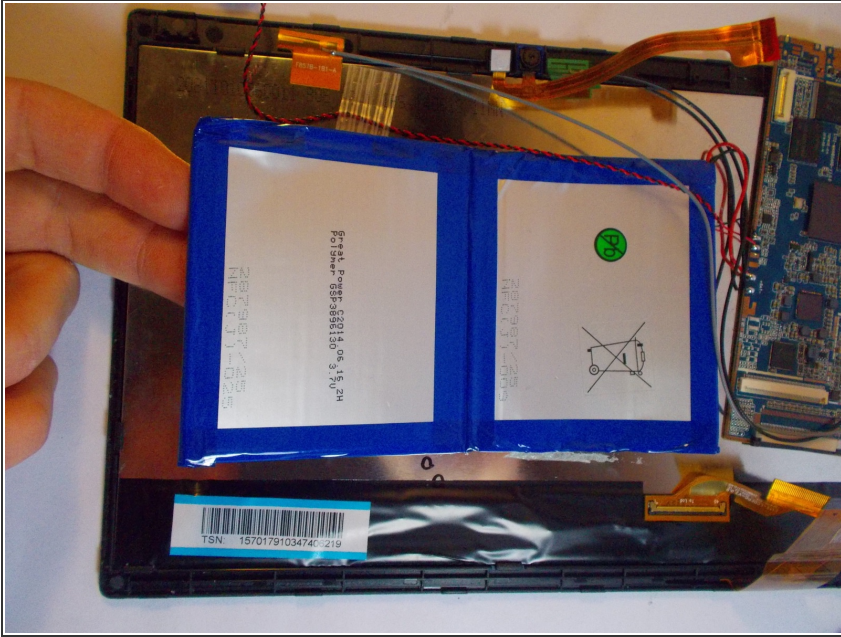

- Peel the battery from the front panel. Be careful not to puncture the battery.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 07:16:35 AM.